

ENGINEER III [S2 WR SRC]

UNISEX: 76736 BLACK

SIZE: EU 36-48, UK 3-13

S2 WR SRC CE UK EN ISO 20345:2011 [S2 WR SRC]



Energy absorbing heel construction

DEFINED HEEL - Provides added safety when on stairs or ladders



Leather upper



WATER RESISTANT upper to temporarily repel water and keep your feet dry



COMPOSITE SAFETY TOE - 200 joules



Metal free



EXTREMELY SLIP-RESISTANT OUTSOLE

- Exceeds the industry norm SR according to EN ISO 20344:2021 slip resistance test



TRIPGUARD

- Allows ease of movement between different surfaces
- Added depth for improved durability and wear time
- Larger surface covered by the outsole provides better slip-resistance



CLOG-RESISTANT traction lugs are widely spaced to prevent dirt and debris getting stuck in the outsole

DATA GUIDE

Certification: EN ISO 20345:2011 [S2 WR SRC]

Upper Material: Leather

Lining Material: Polyester

Midsole Material: EVA


Outsole Material: Rubber

Safety Toe Cap: Composite



Click or scan QR code to view certificate

TESTING THE SLIP RESISTANCE OF OUR SFC OUTSOLE [EN ISO 20344:2021]

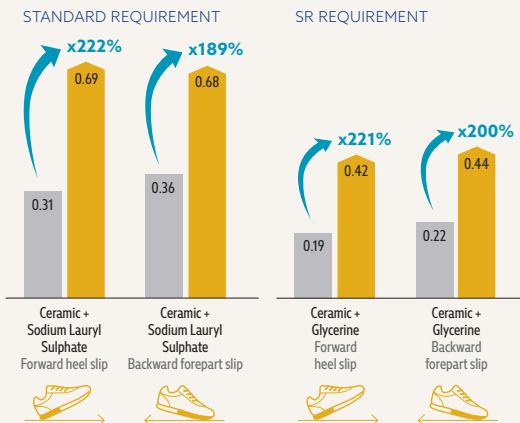

Slip resistance test according to EN ISO 20344:2021, conducted by Intertek Testing Services Shenzhen Ltd., in August 2022; on a scale of 0.0 (without slip resistance) to 1.0 (very high level of slip resistance, e.g. on dry carpeted floors). All SFC shoes are fitted with the patented, slip-resistant Shoes For Crews outsole. Tested product: Carrig Low 62201.

Weight (per shoe):
718 grams
(based on size 41)