

BELTRA [O6 FO SR ESD]

UNISEX: 62208 BLACK

SIZE: EU 35-50, UK 2.5-15

O6 FO SR ESD CE EN ISO 20347:2022 [O6 FO SR ESD]

Pull Loops

Breathable Membrane

Easy to clean

Energy absorbing heel construction

Two-part outsole for more control and flexibility

Fuel resistant

ESD-capable

Antistatic property

Extra cushioning

Removable cushioned insole - recycled EVA



Leather / Mesh



Recycled polyester lining



WATER RESISTANCE of the whole footwear to keep your feet dry



Metal Free



MVT Test Method EN ISO 20345 - 41.2 mg/cm²
ISO 16604 Resistant to blood borne pathogens



Breathable lining material made from 100% recycled plastic bottles



EXTREMELY SLIP-RESISTANT SFC OUTSOLE

- Exceeds the industry norm SR according to EN ISO 20345/47:2022 slip resistance test



TRIPGUARD TO PROTECT AGAINST FALLS

- Allows ease of movement between different surfaces
- Added depth for improved durability and wear time
- Larger surface covered by the outsole provides better slip-resistance



CLOG-RESISTANT traction lugs are widely spaced to prevent dirt and debris getting stuck in the outsole

DATA GUIDE

Certification: EN ISO 20347:2022 [O6 FO SR ESD]

Upper Material: Leather / Mesh

Lining Material: Recycled Polyester

Midsole Material: Recycled EVA

Outsole Material: Rubber

Safety Toe Cap: N/A




Click or scan QR code to view certificate

TESTING THE SLIP RESISTANCE OF OUR SFC OUTSOLE [EN ISO 20344:2021]

STANDARD REQUIREMENT

SR REQUIREMENT

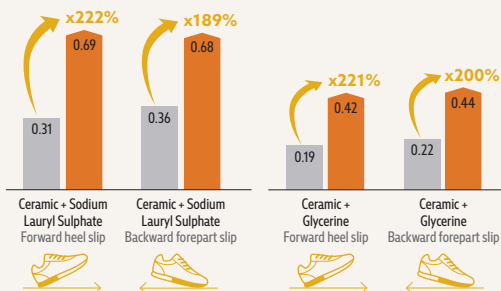

Slip resistance test according to EN ISO 20344:2021, conducted by Intertek Testing Services Shenzhen Ltd., in August 2022; on a scale of 0.0 (without slip resistance) to 1.0 (very high level of slip resistance, e.g. on dry carpeted floors). All SFC shoes are fitted with the patented, slip-resistant Shoes For Crews outsole.

Weight (per shoe):
376 grams
(based on size 42)

