

ZINC [OB E SR]

UNISEX: 62138 WHITE

SIZE: EU 37-47, UK 4-13

OB SR CE UK EN ISO 20347:2022 [OB E SR]


Adjustable strap

Lightweight design

Wide Fit



Energy absorbing heel construction

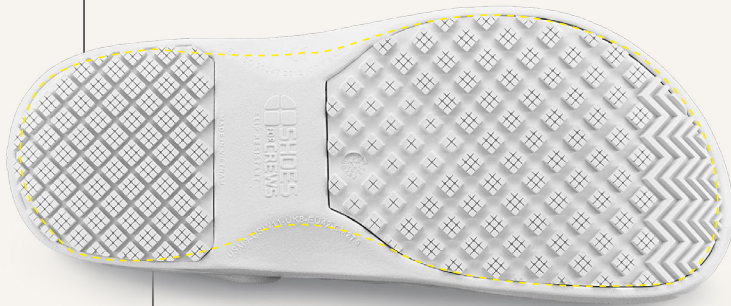

Different traction patterns across the slip-resistant outsole appropriate for the job, work surface and environment



WATER RESISTANT upper to temporarily repel water and keep your feet dry



Metal free



EXTREMELY SLIP-RESISTANT OUTSOLE

- Exceeds the industry norm SR according to EN ISO 20345/47:2022 slip resistance test



TRIPGUARD

- Allows ease of movement between different surfaces
- Added depth for improved durability and wear time
- Larger surface covered by the outsole provides better slip-resistance



CLOG-RESISTANT OUTSOLE

- Traction lugs have wide spacing which won't let dirt and debris get stuck in the outsole

Weight (per shoe):
272 grams
(based on size 38)

DATA GUIDE

Certification: EN ISO 20347:2022 [OB E SR]

Upper Material: EVA

Lining Material: EVA

Midsole Material: EVA

Outsole Material: Rubber

Safety Toe Cap: N/A




Click or scan QR code
To view certificate

TESTING THE SLIP RESISTANCE OF OUR SFC OUTSOLE [EN ISO 20344:2021]

STANDARD REQUIREMENT

SR REQUIREMENT

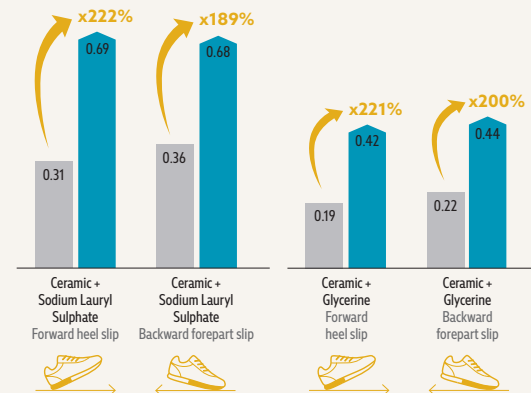

Slip resistance test according to EN ISO 20344:2021, conducted by Intertek Testing Services Shenzhen Ltd., in August 2022; on a scale of 0.0 (without slip resistance) to 1.0 (very high level of slip resistance, e.g. on dry carpeted floors). All SFC shoes are fitted with the patented, slip-resistant Shoes For Crews outsole. Tested product: Carrig Low 62201.

Also available:



Zinc Black: 66064

SHOES
FOR CREWS®